


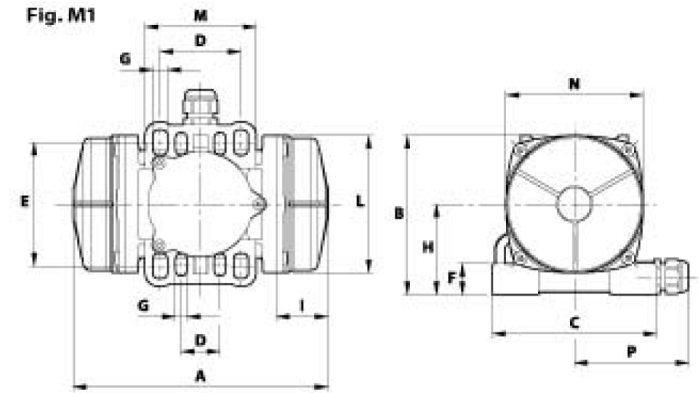

## 2 极 - 3000/3600 rpm

|    | 描 述    |            |    |                 | 机械特性 |      |      |      |       |       |     |     | 电气特性       |     |      |      |                                |      | 型号         | 尺寸(mm)     |     |     |     |                    |                      |    |    |    |    |                      |     |    |     |      |                |                |         | 电缆进<br>口螺纹 |
|----|--------|------------|----|-----------------|------|------|------|------|-------|-------|-----|-----|------------|-----|------|------|--------------------------------|------|------------|------------|-----|-----|-----|--------------------|----------------------|----|----|----|----|----------------------|-----|----|-----|------|----------------|----------------|---------|------------|
|    | 代码     | 型号         | 尺寸 | H2D<br>温度<br>等级 | 静扭矩  |      | 振动力  |      |       |       | 重量  |     | 最大输入<br>功率 |     | 最大电流 |      |                                |      |            | Multi-hole |     |     |     |                    |                      | 孔  |    | 电容 |    |                      |     |    |     |      |                |                |         |            |
|    |        |            |    |                 | kgmm |      | kg   |      | kN    |       | kg  |     | W          |     | A    |      | I <sub>z</sub> /I <sub>N</sub> |      |            | Fig.       | A   | B   | C   | D                  | E                    | øG | N* | F  | H  | I                    | ØL  | M  | N   | P    | 220 V<br>50 Hz | 115 V<br>60 Hz |         |            |
| 三相 | 600467 | M3/65-S02  | 00 | • 120°C         | 6.43 | 6.43 | 64.7 | 93.1 | 0.635 | 0.913 | 4.3 | 4.3 | 120        | 120 | 0.27 | 0.23 | 3.43                           | 3.90 | M3/65-S02  | M1         | 197 | 123 | 127 | 30 - 60<br>65 - 62 | 85 - 100<br>85 - 106 | 9  | 4  | 24 | 70 | 40<br>47<br>59<br>59 | 106 | 86 | 106 | 88,5 | 10             | 28             | M20x1,5 |            |
|    | 600465 | M3/105-S02 | 00 | • 120°C         | 9.64 | 9.64 | 97.0 | 140  | 0.950 | 1.37  | 5.2 | 5.2 | 180        | 180 | 0.35 | 0.30 | 2.68                           | 3.00 | M3/105-S02 | M1         | 211 |     |     |                    |                      |    |    |    |    |                      |     |    |     |      |                |                |         |            |
|    | 600462 | M3/205-S02 | 00 | • 120°C         | 21.0 | 21.0 | 211  | 304  | 2.07  | 2.98  | 6.0 | 6.0 | 180        | 180 | 0.35 | 0.30 | 2.68                           | 3.00 | M3/205-S02 | M1         | 235 |     |     |                    |                      |    |    |    |    |                      |     |    |     |      |                |                |         |            |
|    | 600461 | M3/305-S02 | 00 | • 120°C         | 31.0 | 21.0 | 311  | 304  | 3.05  | 2.98  | 6.3 | 6.0 | 180        | 180 | 0.35 | 0.30 | 2.68                           | 3.00 | M3/305-S02 | M1         | 235 |     |     |                    |                      |    |    |    |    |                      |     |    |     |      |                |                |         |            |
| 单相 | 600467 | M3/65-S02  | 00 | • 120°C         | 6.43 | 6.43 | 64.7 | 93.1 | 0.635 | 0.913 | 4.3 | 4.3 | 110        | 110 | 0.56 | 1.52 | 2.24                           | 2.24 | M3/65-S02  | M1         | 197 | 123 | 127 | 30 - 60<br>65 - 62 | 85 - 100<br>85 - 106 | 9  | 4  | 24 | 70 | 40<br>47<br>59<br>59 | 106 | 86 | 106 | 88,5 | 10             | 28             | M20x1,5 |            |
|    | 600465 | M3/105-S02 | 00 | • 120°C         | 9.64 | 9.64 | 97.0 | 140  | 0.950 | 1.37  | 5.2 | 5.2 | 165        | 165 | 0.75 | 1.52 | 1.67                           | 2.24 | M3/105-S02 | M1         | 211 |     |     |                    |                      |    |    |    |    |                      |     |    |     |      |                |                |         |            |
|    | 600462 | M3/205-S02 | 00 | • 120°C         | 21.0 | 21.0 | 211  | 304  | 2.07  | 2.98  | 6.0 | 6.0 | 165        | 165 | 0.75 | 1.52 | 1.67                           | 2.24 | M3/205-S02 | M1         | 235 |     |     |                    |                      |    |    |    |    |                      |     |    |     |      |                |                |         |            |
|    | 600461 | M3/305-S02 | 00 | • 120°C         | 31.0 | 21.0 | 311  | 304  | 3.05  | 2.98  | 6.3 | 6.0 | 165        | 165 | 0.75 | 1.52 | 1.67                           | 2.24 | M3/305-S02 | M1         | 235 |     |     |                    |                      |    |    |    |    |                      |     |    |     |      |                |                |         |            |
|    |        |            |    |                 |      |      |      |      |       |       |     |     |            |     |      |      |                                |      |            |            |     |     |     |                    |                      |    |    |    |    |                      |     |    |     |      |                |                |         |            |

## 4 极 - 1500/1800 rpm

| 描 述 |        |            |                 | 机械特性        |       |           |       |       |       |          |       | 电气特性            |       |                |                |       |       |       |            | 型号 | 尺寸(mm)     |     |     |                    |                      |    |    |    |    |    |     |    |     |      |      |    |         |  | 电容<br>(μF) | 电缆进<br>口螺纹 |
|-----|--------|------------|-----------------|-------------|-------|-----------|-------|-------|-------|----------|-------|-----------------|-------|----------------|----------------|-------|-------|-------|------------|----|------------|-----|-----|--------------------|----------------------|----|----|----|----|----|-----|----|-----|------|------|----|---------|--|------------|------------|
| 代码  | 型号     | 尺寸         | H2D<br>温度<br>等级 | 静扭矩<br>kgmm |       | 振动力<br>kg |       |       |       | 重量<br>kg |       | 最大输入<br>功率<br>W |       | 最大电流<br>A      |                |       |       | Is/In | Fig.       |    | Multi-hole |     |     |                    | 孔                    |    |    |    |    |    |     |    |     |      |      |    |         |  |            |            |
|     |        |            |                 | 50 Hz       | 60 Hz | 50 Hz     | 60 Hz | 50 Hz | 60 Hz | 50 Hz    | 60 Hz | 50 Hz           | 60 Hz | 400 V<br>50 Hz | 400 V<br>60 Hz | 50 Hz | 60 Hz |       |            |    | A          | B   | C   | D                  | E                    | øG | N* | F  | H  | I  | ØL  | M  | N   | P    |      |    |         |  |            |            |
| 三相  | 601514 | M15/36-S02 | 00              | • 120°C     | 12.0  | 12.0      | 30.2  | 43.5  | 0.30  | 0.43     | 5.4   | 5.4             | 85    | 95             | 0.21           | 0.20  | 1.78  | 1.95  | M15/36-S02 | M1 | 235        | 123 | 127 | 30 - 60<br>65 - 62 | 85 - 100<br>85 - 106 | 9  | 4  | 24 | 70 | 59 | 106 | 86 | 106 | 88.5 | -    | -  | M20x1,5 |  |            |            |
|     | 601515 | M15/81-S02 | 00              | • 120°C     | 31.0  | 21.0      | 77.9  | 76.1  | 0.76  | 0.75     | 6.3   | 6.0             | 85    | 95             | 0.21           | 0.20  | 1.78  | 1.95  | M15/81-S02 | M1 |            |     |     |                    |                      |    |    |    |    |    |     |    |     |      |      |    |         |  |            |            |
| 单相  | 601514 | M15/36-S02 | 00              | • 120°C     | 12.0  | 12.0      | 30.2  | 43.5  | 0.30  | 0.43     | 5.4   | 5.4             | 90    | 100            | 0.43           | 1.00  | 1.20  | 1.30  | M15/36-S02 | M1 | 235        | 123 | 127 | 30 - 60<br>65 - 62 | 85 - 100<br>85 - 106 | 9  | 4  | 24 | 70 | 59 | 106 | 86 | 106 | 88.5 | 3.15 | 25 | M20x1,5 |  |            |            |
|     | 601515 | M15/81-S02 | 00              | • 120°C     | 31.0  | 21.0      | 77.9  | 76.1  | 0.76  | 0.75     | 6.3   | 6.0             | 90    | 100            | 0.43           | 1.00  | 1.20  | 1.30  | M15/81-S02 | M1 |            |     |     |                    |                      |    |    |    |    |    |     |    |     |      |      |    |         |  |            |            |

\* 工作扭矩=2 × 静扭矩

I<sub>s</sub>/I<sub>m</sub> = ratio between start-up current and maximum current.