

MVTX 18系列防爆振动电机

三相

描述		认证		机械特性						电气特性					
型号	机座			静扭矩 in-lbs		振动力 lbs		重量 lbs		输出功率 HP		最大电流 A			
		50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	400V 50Hz	460V 60Hz				
MVTX 18-7700	70					119	82,7	7590	7700	372	348	2,50	2,50	4,00	3,50
MVTX 18-10900	80					173	121	11015	11051	517	484	3,50	3,50	5,40	4,85
MVTX 18-17500	90					274	191	17446	17446	669	636	4,30	4,70	6,50	6,20

* 工作扭矩=2x静扭矩。静扭矩=不平衡量。
230V, 60HZ的电流是460V, 60HZ的两倍。
1in=25.4mm 1lbs=0.4532kg 1kg.mm=11.43lbs.in



I 类C和D组温度等级T3 (200℃)
文件号: E129825.



产品由欧洲指令94/9/EC指令批准: ATEX II2G,
Ex d IIB T140° C Gb. EN 60079-0, EN 60079-1.
认证号: DEMKO 12 ATEX 1103487X



产品由IECEX Scheme批准:
Ex d IIB T140° C Gb. IEC 60079-0, IEC 60079-1
证书号: IECEX UL 11.0043X



适用于防爆振动电机Exd的GGTN许可和
Gost-R认证符合标准: GOST R 51330.0-99,
GOST R 51330.1-99.

	RPM	Hz
4极	1500	50
	1800	60

尺寸(inches)


地脚孔

类型	A	B	C	D	D1	E	ØG	No	F	H	I	ØL	M	M1	N	N1
MVTX FS70	44,49	12,80	11,18	37,76	-	8,996	1,06	4	2,24	5,31	4,72	1,69	1,73	1,50	7,20	-
MVTX FS80	58,31	14,45	11,18	▲	▲	▲	▲	8	2,24	6,30	4,72	*	*	-	13,0	7,64
MVTX FS90	53,74	15,67	12,99	▲	▲	▲	▲	8	2,28	7,09	-	*	3,35	-	13,78	-


1in=25.4mm

▲ 适用于不同的螺栓装配方式

■ MVTX FS70

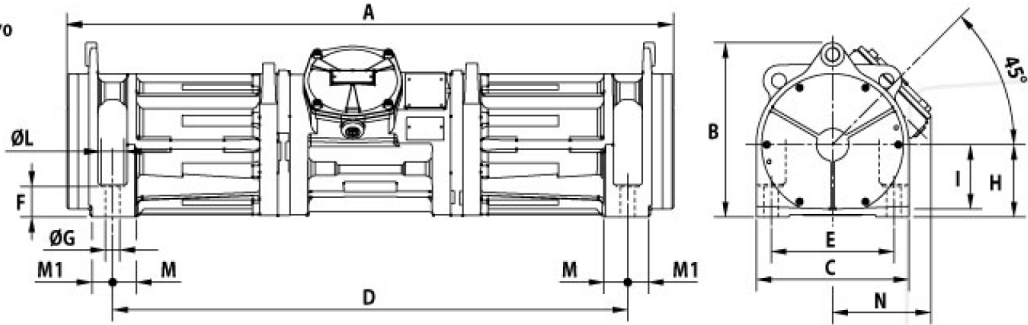

■ MVTX FS80

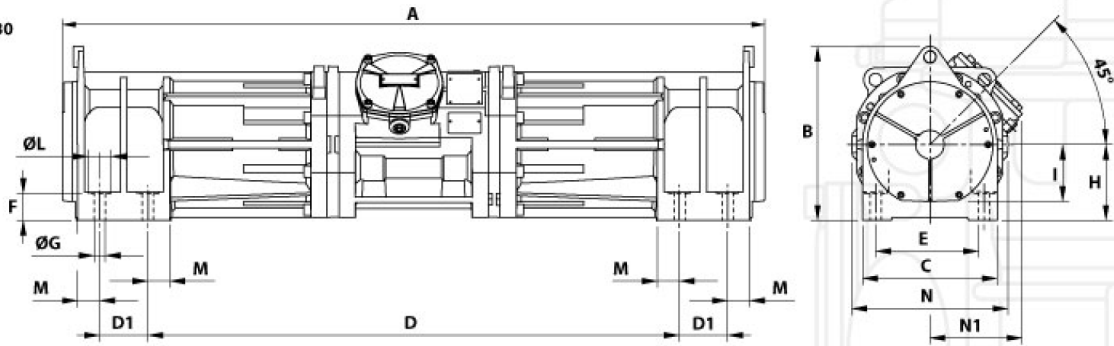

■ MVTX FS90

